



**SIZING CHART BY 24"X24"OPENING**



HOUSING HEIGHT									
1/2	1	1 1/2	2	2 1/2	3	3 1/2	4		
15 5/8"	27 5/8"	41 1/4"	51 1/4"	64 7/8"	75 7/8"	89 1/2"	100 1/2"		
HOUSING WIDTH									
1/2	1	1 1/2	2	2 1/2	3	3 1/2	4	4 1/2	5
12"	24"	36"	48"	60"	72"	84"	96"	108"	120"

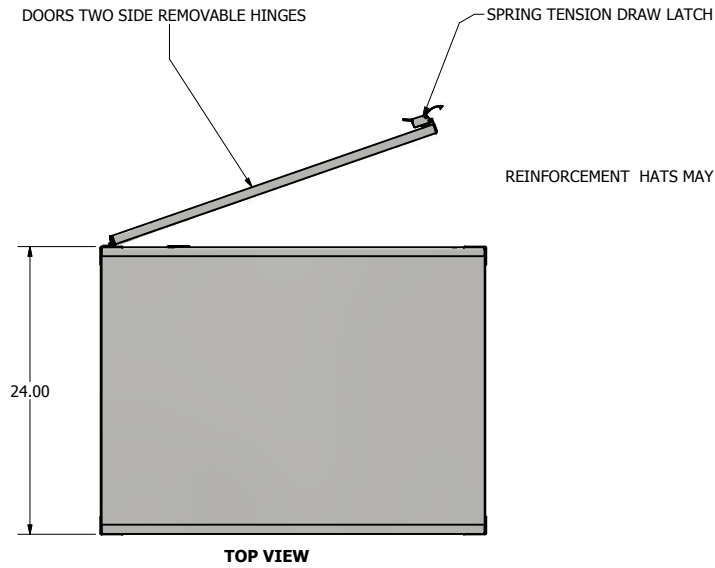

REINFORCEMENT HATS MAY BE REQUIRED AS NEEDED

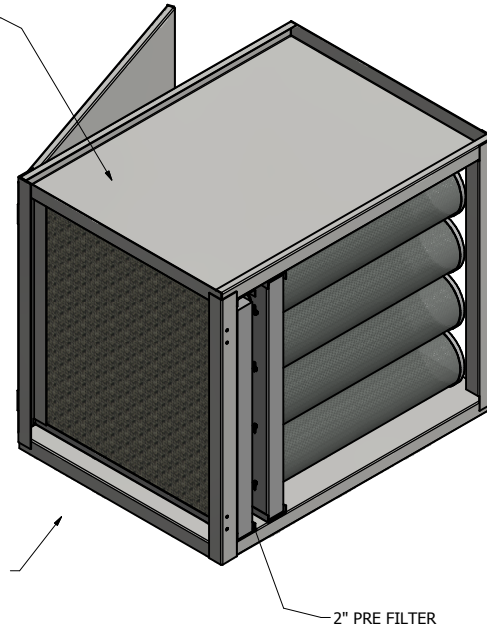

**AIR FLOW**

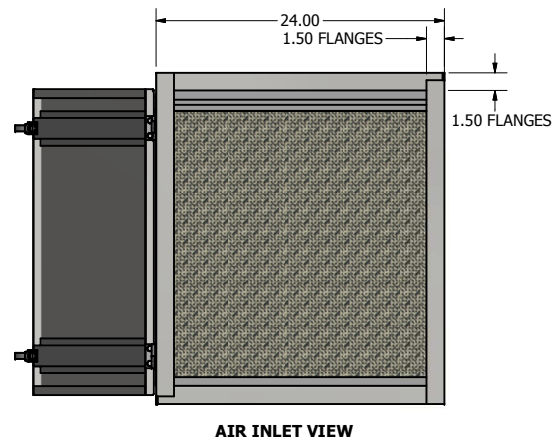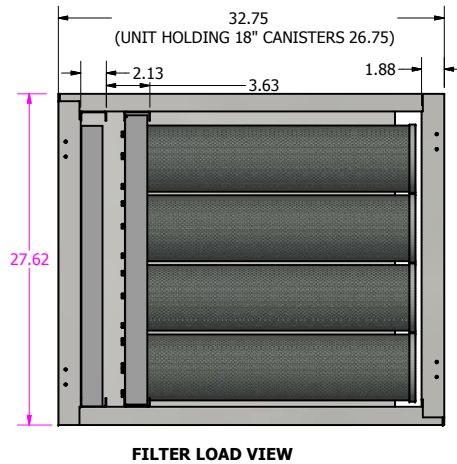

NOTE: MODEL SHOWN ONLY HAS ONE DOOR

***SPECIFICATIONS***

MADE FROM 16 GAUGE CRS POWDER COAT FINISH STITCH WELDED CONSTRUCTION

(OPTIONAL: ALUMINIZED STEEL OR STAINLESS STEEL)

FILTERS UNIT HOLDS:

2" PRE 23 3/8" X 23 3/8" X 1 3/4"  
( HALF SIZE 11 3/8" X 23 3/8" X 1 3/4" )

16- 24" X 5 3/4" RD X 1" CANISTERS OR

16- 18" X 5 3/4" RD X 1" CANISTERS ( HALF SIZE HOLDS 8-18" OR 24" )

DESIGN VELOCITY: 2000CFM PER 24"X24"OPENING (W.G NOT INCLUDING PRE OR POST FILTER)

.66" W.G @500 FT/MN 2000CFM 50% BLEND

MEDIA WEIGHT: +/- 5%

24" CANISTER

CARBON - 96LBS

50% BLEND POTASUIM/CARBON - 132 LBS

POTASUIM - 160 LBS

18" CANISTER

CARBON - 72 LBS

50% BLEND POTASUIM/CARBON - 68 LBS

POTASUIM - 120 LBS

REVC: 5 / 17 / 2013

SIZE CHANGE TO 32 3/4" AND 26 3/4" DEPTH OF UNIT

REV D: 8/18/14

DRAWING CHANGED TO BE 2" PRE FILTER

DRAWN	2/4/2013	<b>INDUSTRY AIR SALES</b>	TITLE	REV
mfulker				
CHECKED		1X1 2P-CANISTER		D
TOLERANCE:	+/- 1/16	SIZE	DWG NO	
SQUARNESS	+/- 1/8	C	1X1 CAN	
		SCALE		SHEET 1 OF 1